


**Loadspace Trim Panel - Coupe****Removal****NOTE:** RH side shown, LH side similar.

1. Position aside the door weatherstrip.




2. Release the clips and remove the scuffplate trim panel.

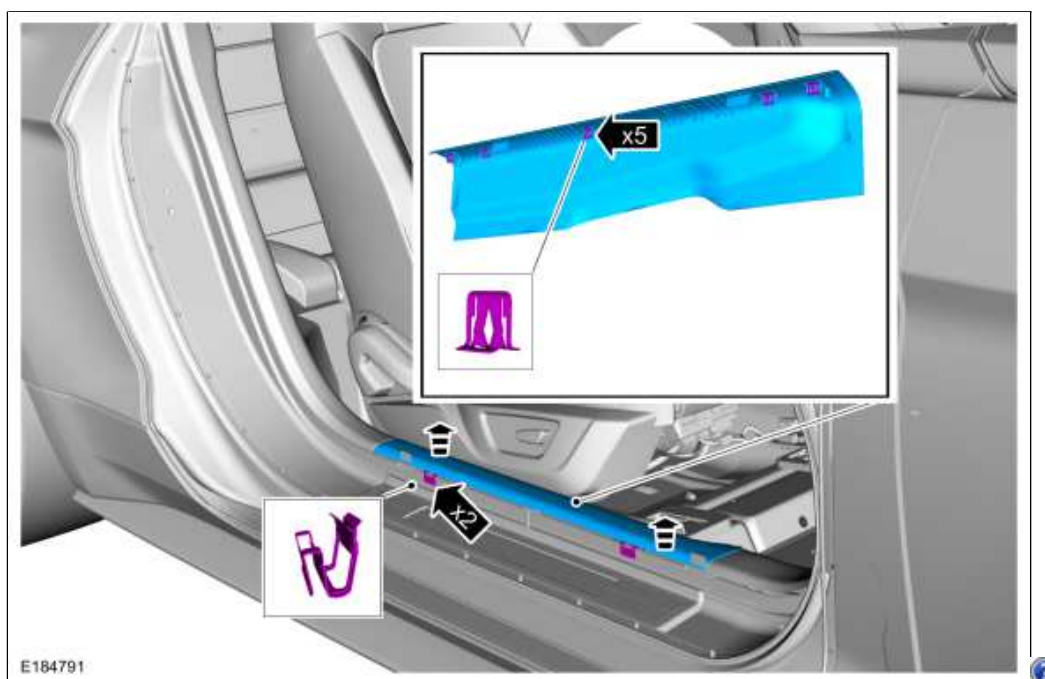

3. Remove the rear seat cushion.  
Refer to: [Rear Seat Cushion](#) (501-10B Rear Seats, Removal and Installation).

4. Position aside the safety belt guide, release the clips and remove the loadspace trim panel.

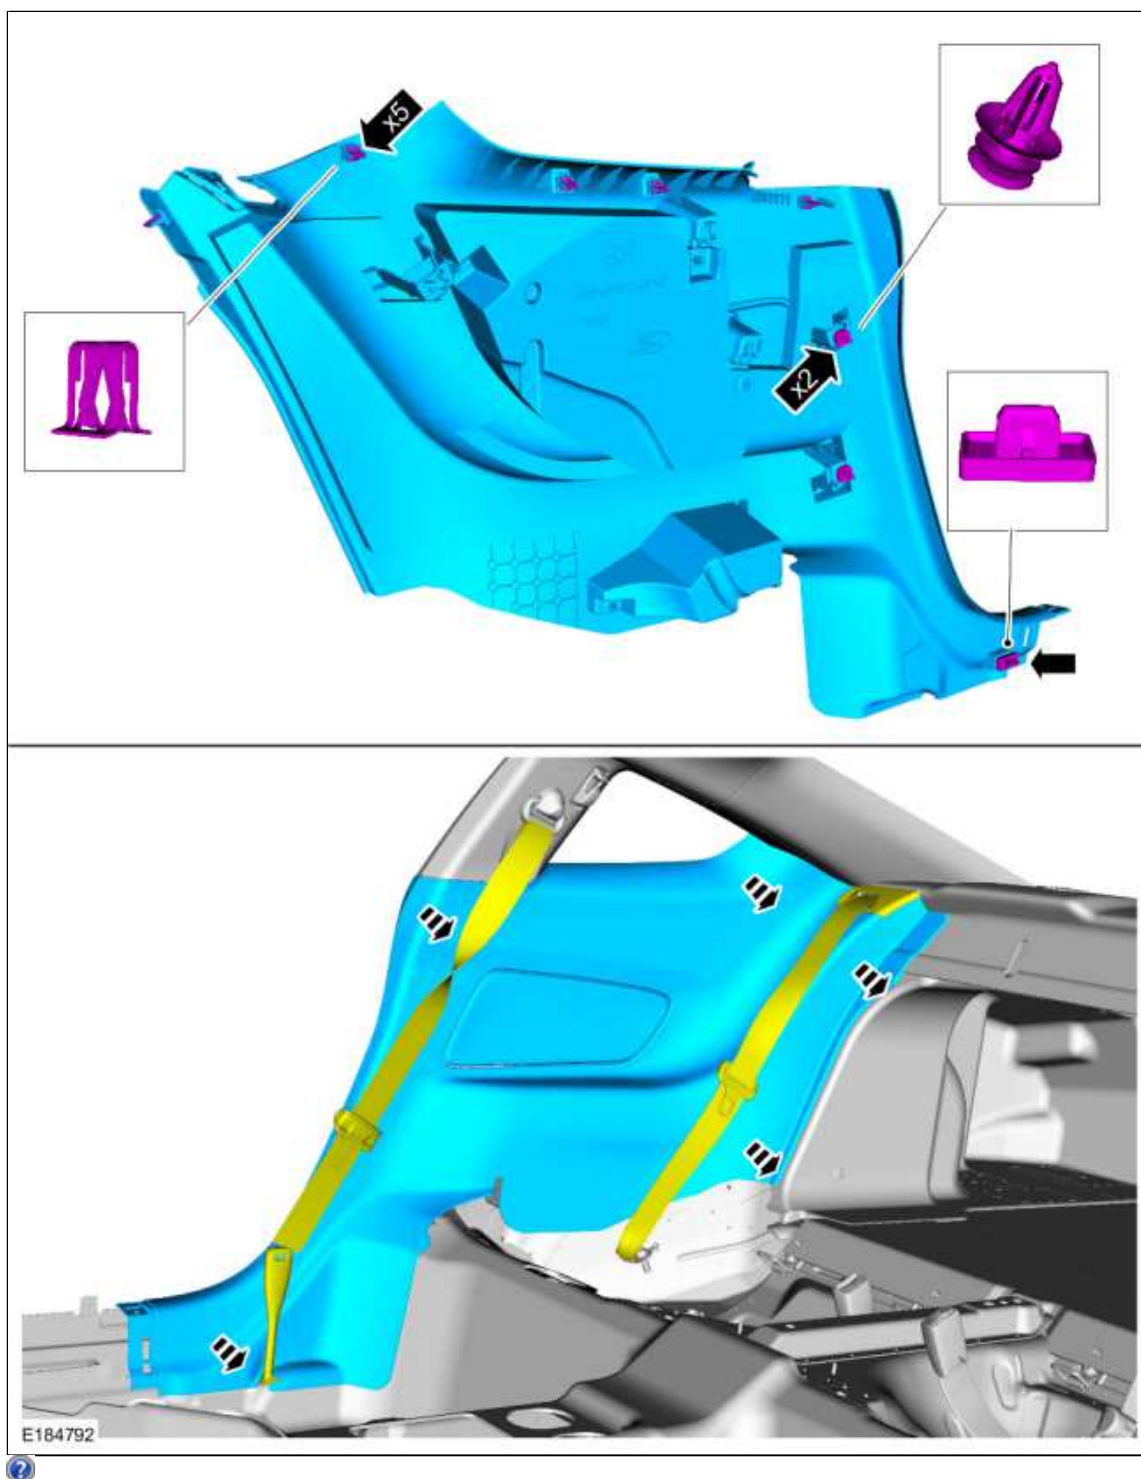

### Installation

**NOTE:** During installation, make sure the safety belt webbing is not twisted and the safety belts and buckles are accessible to the occupants.

1. To install, reverse the removal procedure.